


Rawhide Hose

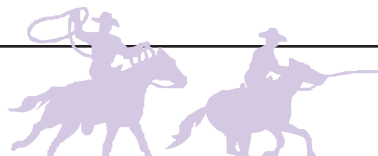

Super abrasive-resistant cover hose for use with: hot- or cold-water pressure washers

All standard RAWHIDE assemblies include:

- 1 solid end and 1 swivel end
- 6" molded vinyl, color coded bend restrictors (both ends)
- Deluxe hose available with quick connects

- Beefed up high tensile steel wire braid for full 4:1 burst factor
- Superior flexibility
- Smooth bore Synthetic Rubber inner core for greater life and minimal pressure loss
- Temperature up to 250°F



Rawhide 1-Wire 3000 PSI Black Hose

- Durable smooth outer cover

Part No. Black	Length	Working PSI	Approx wt lbs
3/8" Hose			
158265	25'	3000	6.00
158270	30'	3000	7.00
158275	40'	3000	10.00
158280	50'	3000	12.00
158285	75'	3000	17.00
158290	100'	3000	23.00
158295	150'	3000	34.00
158200*	500'	3000	

1/4" Hose

158165	25'	3000	4.00
158180	50'	3000	8.00
158185	75'	3000	12.00
158190	100'	3000	16.00
158195	150'	3000	24.00
158100*	500'	3000	

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

Rawhide 1-Wire 3000 PSI Blue & Yellow Non-Marking Hose

- Durable smooth outer cover

ANIMAL FAT RESISTANT

Part No. Black	Length	Working PSI	Approx wt lbs
3/8" Yellow Hose			
158965	25'	3000	7.00
158980	50'	3000	12.00
158985	75'	3000	17.00
158990	100'	3000	23.00
158900*	500'	3000	

3/8" Blue Hose

158765	25'	3000	7.00
158780	50'	3000	12.00
158785	75'	3000	17.00
158790	100'	3000	23.00
158795	150'	3000	34.00
158700*	500'	3000	

1/4" Blue Hose

158880	50'	3000	8.00
158890	100'	3000	16.00
158800*	500'	3000	

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

Rawhide 2-Wire 5000 PSI & 6000 PSI Black 3/8" Hose

- Durable wrapped finish outer cover
- Full 4:1 safety factor



5000 PSI Hose

Part No. Black	Length	Working PSI	Approx wt lbs
159565	25'	5000	9.00
159580	50'	5000	17.00
159585	75'	5000	25.00
159590	100'	5000	33.00
159595	150'	5000	48.00
159500*	500'	5000	

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

6000 PSI Hose

Part No. Black	Length	Working PSI	Approx wt lbs
159305	25'	6000	9.0
159310	50'	6000	17.0
159315	75'	6000	25.0
159320	100'	6000	33.0
159325	150'	6000	48.0
159300*	500'	6000	

*500 ft reel, 50 ft incremental lengths (max 3 pieces)

Apex 3000 PSI Hose & Ultima 4500 PSI Hose

Smooth cover hose for use with: hot- or cold-water pressure washers

All standard Apex and Ultima assemblies include:

- 1 solid end and 1 swivel end
- 6" molded vinyl bend restrictors (both ends)
- Smooth outer cover
- Apex 3000 PSI single high tensile steel wire braid
- Ultima 4500 PSI double wire braid high tensile steel
- Seamless inner tube
- Deluxe hose available with quick connects
- Temperature up to 250°F



Apex 3000 1-Wire 3000 PSI Hose

Part No. Black	Length	Working PSI	Approx wt lbs
3/8" Hose			
153550	15'	3000	5.0
153555	25'	3000	7.0
153560	30'	3000	9.0
153565	40'	3000	11.0
153570	50'	3000	13.0
153575	75'	3000	19.0
153590	100'	3000	25.0
153595	150'	3000	37.0
153000*	Full Reel		

1/2" Hose			
155425	25'	3000	7.50
155450	50'	3000	14.00
155475	75'	3000	21.00
155499	100'	3000	27.00
155400*	Full Reel		

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

1/4" Hose			
151025	25'	3000	5.00
151030	30'	3000	6.00
151050	50'	3000	10.00
151075	75'	3000	15.00
151090	100'	3000	20.00
151000*	Carton Pack - Reel 500 ft		

*Full Reel – 700 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

Custom Lengths

3/8" Hose			
153000	per ft / hose only		
150232*	add fitting(s) and bend restrictor		
150205*	add fitting(s) only		

1/2" Hose			
155400	per ft / hose only		
150220*	add fitting(s) and bend restrictor		
150222*	add fitting(s) only		

1/4" Hose			
151000	per ft / hose only		
150210*	add fitting(s) and bend restrictor		
150212*	add fitting(s) only		

*Assembly – Add to cost of custom length (labor & fittings - 1 solid, 1 swivel)

Ultima 4500 2-Wire 4500 PSI

Part No. Black	Length	Working PSI	Approx wt lbs
3/8" Hose			
154215	15'	4500	5.75
154225	25'	4500	8.00
154250	50'	4500	15.00
154275	75'	4500	22.00
154290	100'	4500	28.00
154294	150'	4500	42.00
154000*	Full Reel		

1/2" Hose			
155725	25'	4500	9.25
155750	50'	4500	18.00
155775	75'	4500	26.80
155790	100'	4500	35.50
155700**	Carton Pack - Reel 500 ft		

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

**Full Carton – 330 ft per reel, hose only (max 3 pieces)

Custom Lengths

3/8" Hose			
154000	per ft / hose only		
150204*	add fitting(s) and bend restrictor		
150202*	add fitting(s) only		

*Assembly – Add to cost of custom length (labor & fittings - 1 solid, 1 swivel)

1/2" Hose			
155700	per ft / hose only		
150224*	add fitting(s) and bend restrictor		
150222*	add fitting(s) only		

*Assembly – Add to cost of custom length (labor & fittings - 1 solid MPT, 1 swivel MPT)

3/8" Blue Non-Marking Hose

Fat & Oil Resistant

Part No. Blue	Length	Working PSI	Approx wt lbs
154410	25'	4500	8.00
154415	50'	4500	15.00
154420	75'	4500	22.00
154425	100'	4500	28.00
154400*			

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

Custom Lengths

154400	per ft / hose only		
150204*	add fitting(s) and bend restrictor		
150202*	add fitting(s) only		

*Assembly – Add to cost of custom length (labor & fittings - 1 solid, 1 swivel)

Hobby Hose

Replacement hose for most hobby pressure washers sold by mass retailers.



- Thermoplastic cover
- Fiber-braid reinforcement
- 2250 PSI working pressure
- 9000 PSI burst pressure
- M22 x 1.5 fitting inlet
- 14mm seal cone fits Generac & Excell
- 15mm seal cone fits Campbell, MI-T-M

Part No.	Seal Cone	ID	Length
150245	14mm	1/4"	25 ft
150246	15mm	1/4"	25 ft

4-02010025M	22mm*	1/4"	25 ft
-------------	-------	------	-------

NOTE: See Hobby Gun and Lance on page 10.

*Both Ends

Whitewater® Combination Steam Hose



Good up to 3000 PSI / 250°F or 350 PSI / 325°F (1/2" hose 2500 PSI max).



- Single high-tensile steel wire braid
- High temperature bend restrictors – both ends
- Seamless innertube
- Solid 3/8" or 1/2" MPT connectors – both ends (Swivel ends NOT available)
- Oil-resistant cover

Part No.	Length
----------	--------

3/8" Hose

153930	30'
153950	50'
153925	25'
153975	75'
153990	100'
153900*	Full Reel

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

1/2" Hose

155625	25'
155650	50'
155675	75'
155690	100'
155600*	Full Reel

*Full Reel – 500 ft per reel, hose only, 50 ft incremental lengths (max 3 pieces)

Custom Lengths

3/8" Hose

153900	per ft / hose only
150215*	add fitting(s) and bend restrictor
150216*	add fitting(s) only

1/2" Hose

155600	per ft / hose only
150230*	add fitting(s) and bend restrictor
150228*	add fitting(s) only

*Assembly – Add to cost of custom length (labor & fittings - 2 solid MPT)

Sewer Hose

SUPER FLEXIBLE SEWER LINE HOSE Hose and couplings have small outside diameter, allowing hose and nozzles to fit through sewer line. Sewer line has Super Tough poly-ether cover over ultra-flexible nylon tube. (1/8" sewer nozzle and hose will operate through many 1-1/2" lines.)

(Nozzles not included.)



- 160°F max temperature
- Nylon tube, poly-ether cover

Part No.	Description
----------	-------------

1/8" Hose – 4800 PSI, 1/4" inlet / 1/8" outlet

150960 1/8" x 25'

150963 1/8" x 50'

150964 1/8" x 100'

1/4" Hose – 2600 PSI, 1/4" inlet / 1/4" outlet

150968 1/4" x 50'

150970 1/4" x 100'

1/4" Hose – 4400 PSI, 1/4" inlet / 1/4" outlet

150972 1/4" x 50'

150973 1/4" x 100'

Hose Bend Restrictors



- Top quality molded fit bend restrictors
- Fits snugly to prevent kinks near the connectors
- Used on hose assemblies
- Non-slip sure fit
- Easy installation, 325°F

Part No.	Size	Hose Size/Type	Color/Material
150166	5.3"	1/4" 1 wire	Black Vinyl
150161	6.0"	3/8" 1 wire	Black Vinyl
150164	6.0"	3/8" 2 wire	Red Vinyl
150170	7.0"	1/2" 1 wire	Black Vinyl
150168	7.0"	1/2" 2 wire	Red Vinyl
150174	6.5"	3/8" Combo	Gray Vinyl
150172	6.5**	1/2" Combo	Black Rubber

*Insulated Rubber

Orange 600 Sprayer Hose & Ribbed PVC Sprayer Hose

Braid reinforced PVC hose designed specifically for AG/ Pest control spraying applications.



- Tough Ribbed Cover
- Color - Orange
- 600 PSI max pressure
- Bulk Hose Standard in 300' Single Length Coils
- Resists Abrasion and UV Rays

Part No.	Length	Working PSI	Approx wt lbs
3/8" Hose - Orange			
150630	300' Coil (Single, Uncut Length)		
150634	50' Length (Bulk)		
150636	100' Length (Bulk)		
150632	Per Foot (Minimum 25')		
1/2" Hose - Orange			
150601	300' Coil (Single, Uncut Length)		
150603	50' Length		
150606	100' Length		
150602	Per Foot (Minimum 25')		
3/4" Hose - Orange			
150660	300' Coil (Single, Uncut Length)		
150662	Per Foot (Minimum 25')		

NOTE: All Above Hose Can Be Custom Fitted – with MPT Fittings, Male or Female Garden Hose Solid or Swivel Fittings, with or without Bend Restrictors, etc. Combinations Are Too Numerous To List – CALL FOR CUSTOM ASSEMBLY PRICING!

Garden Hose

The Essential Product for Pressure Washing



- Rated for cold water use
- Reinforced hose for flexibility & strength in all weather
- Assemblies complete with bend restrictor
- 5/8" or larger ID for full flow
- Choice of Commercial or Heavy-duty grade
- Commercial grade has machined octagonal "wrench tight" fittings

Part No.	Length	ID	Grade	Color
121315	50'	5/8"	Com	Gray
121319	100'	5/8"	Com	Gray
121332	50'	5/8"	HD	Lt. Green
121336	100'	5/8"	HD	Lt. Green
All Rubber Reinforced Hot Water (160°F) Hose				
121344	50'	5/8"	Com	Red
121348	50'	3/4"	Com	Red

The "Engineered" Reusable Couplings

Design and Build Your Own Hose or Adapt and Repair Hose in the Field (No Crimper Required)



Reusable Couplings for 1 Wire Braid Hose

Part No.	ID x MPT	
150502	1/4" x 1/4"	Solid
150505	1/4" x 1/4"	Swivel
150510	3/8" x 1/4"	Solid
150511	3/8" x 3/8"	Solid
150513	3/8" x 3/8"	Swivel
150515	1/2" x 3/8"	Solid
150516	1/2" x 1/2"	Solid
150518	1/2" x 1/2"	Swivel

Reusable Couplings for 2 Wire Braid Hose

Part No.	ID x MPT	
150532	1/4" x 1/4"	Solid
150535	1/4" x 1/4"	Swivel
150540	3/8" x 1/4"	Solid
150541	3/8" x 3/8"	Solid
150543	3/8" x 3/8"	Swivel
150546	1/2" x 1/2"	Solid
150548	1/2" x 1/2"	Swivel

Connector Hose - 2' - 10'



Connector hose come with 1 solid / 1 swivel end. Note: Add suffix "B" to include 6" bend restrictors.

Part No.	Length	Part No.	Length
3/8" Ultima - 2 wire 4500 PSI			
154102	2'	154107	7'
154103	3'	154108	8'
154104	4'	154109	9'
154105	5'	154110	10'
154106	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
3/8" Apex 3000 - 1 wire 3000 PSI			
153002	2'	153007	7'
153003	3'	153008	8'
153004	4'	153009	9'
153005	5'	153010	10'
153006	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
1/2" Ultima 4500 - 2 wire 4500 PSI			
155702	2'	155707	7'
155703	3'	155708	8'
155704	4'	155709	9'
155705	5'	155710	10'
155706	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
1/4" Apex 3000 - 1 wire 3000 PSI			
151002	2'	151007	7'
151003	3'	151008	8'
151004	4'	151009	9'
151005	5'	151010	10'
151006	6'		

NOTE: Add suffix "B" to include Bend Restrictors

Connector Hose / Car Wash Bay Hose - 12' - 25'



All Car Wash Bay hose come with Solid Male Pipe on both ends. Add suffix "B" to include bend restrictors on one end. See other options at the bottom of this page.

Part No.	Length	Part No.	Length
3/8" Apex 3000 - 1 wire 3000 PSI			
261212	12'	261219	19'
261213	13'	261220	20'
261214	14'	261221	21'
261215	15'	261222	22'
261216	16'	261223	23'
261217	17'	261224	24'
261218	18'	261225	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
1/4" Apex 3000 - 1 wire 3000 PSI			
261112	12'	261119	19'
261113	13'	261120	20'
261114	14'	261121	21'
261115	15'	261122	22'
261116	16'	261123	23'
261117	17'	261124	24'
261118	1	261125	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
3/8" Blue - 1 wire 3000 PSI			
261312	12'	261319	19'
261313	13'	261320	20'
261314	14'	261321	21'
261315	15'	261322	22'
261316	16'	261323	23'
261317	17'	261324	24'
261318	18'	261325	25'

NOTE: Add suffix "B" to include Bend Restrictors

Part No.	Length	Part No.	Length
1/4" Blue - 1 wire 3000 PSI			
261362	12'	261369	19'
261363	13'	261370	20'
261364	14'	261371	21'
261365	15'	261372	22'
261366	16'	261373	23'
261367	17'	261374	24'
261368	18'	261375	25'

NOTE: Add suffix "B" to include Bend Restrictors

Clear PVC Tubing



- “Box Pak” 100 ft
- 25°F to 150°F
- Very flexible – Non-reinforced
- Packaged in self-dispensing box

Part No.	ID	OD	WP @ 70°F
121070	1/4"	3/8"	55
121106	1/2"	5/8"	30

Flex Line Bypass / Supply Line Hose

Industrial PVC hose with black seamless inner tube, polyester braid reinforced tough outer cover. Excellent for use as supply lines or bypass lines. Typically used for air hose.



- Looks & feels like rubber
- Super flexible
- Smooth dirt- & oil-resistant finish
- Abrasion-resistant cover
- Burst-rated 3 times WP

Part No.	ID x OD	WP @ 70°	Roll Length
Red Cover, heavy wall			
121081	3/8" x .634"	300	50'
121084	3/8" x .634"	300	500'
121087	1/2" x .792"	250	50'
121090	1/2" x .792"	250	500'
121097	3/4" x 1.14"	160	50'
121099	3/4" x 1.14"	160	300'

Part No.	ID x OD	WP @ 70°	Roll Length
Black Cover, standard wall			
121143	1/4" x .475"	250	300'
121147	3/8" x .614"	250	100'
121148	3/8" x .614"	250	300'
121153	1/2" x .752"	250	300'

Part No.	ID x OD	WP @ 70°	Roll Length
Blue Cover, standard wall			
121160	1/4" x .475"	250	100'
121165	3/8" x .614"	250	100'
121166	3/8" x .614"	250	300'

Clear Reinforced PVC Tubing

Multi-use industrial grade tubing with high resistance to chemicals, solvents & fuel.



- Reinforced with polyester cord
- Huge selection of sizes and lengths
- 4 to 1 Burst Safety Factor

	ID x OD	WP @ 70°	Roll Length
121031	1/4" x 3/8"	250	25'
121032	1/4" x 3/8"	250	50'
121033	1/4" x 3/8"	250	100'
121034	1/4" x 3/8"	250	300'
121036	3/8" x 1/2"	175	25'
121037	3/8" x 1/2"	175	50'
121038	3/8" x 1/2"	175	100'
121039	3/8" x 1/2"	175	300'
121041	1/2" x 3/4"	175	25'
121042	1/2" x 3/4"	175	50'
121043	1/2" x 3/4"	175	100'
121044	1/2" x 3/4"	175	300'
121046	5/8" x 7/8"	175	25'
121047	5/8" x 7/8"	140	50'
121048	5/8" x 7/8"	140	100'
121049	5/8" x 7/8"	140	300'
121051	3/4" x 1"	140	25'
121052	3/4" x 1"	140	50'
121053	3/4" x 1"	140	100'
121054	3/4" x 1"	140	300'
121059	1" x 1 1/4"	75	25'
121060	1" x 1 1/4"	75	50'
121061	1" x 1 1/4"	75	100'
121063	1" x 1 1/4"	75	200'

See page 24 for hose clamps

Pulse Hose



- 1300 PSI working pressure
- Available with either plug-end or open flow with solid/swivel connects
- 3/8" MPT on both styles

Part No.	Description
381118	18" with Plug End
381124	24" with Plug End
381128	28" Solid/Swivel - Open
381136	36" Solid/Swivel - Open

Revolutionary 360° Swivel Design

The Rapid Reel Pivot Reel takes the muscle and pain out of fighting high-pressure hose and keeps them safely stored away from traffic. Featuring a sturdy, lockable, 360° swivel design, the Pivot Reel is always aligned with the hose for tangle-free pressure washing. The Pivot Reel offers two types of hose reels: pivot and standard (non-pivot).

All are rated at 5000 PSI and 325°F to meet maximum limits of standard 3/8" pressure Washer. Reels carry a two-year warranty.

Pivot Reels have a number of distinctive features, including stainless steel rotor and dual seal swivel, "flip-over" hose guide, spring-action pin to prevent slippage when winding hose and easy-to-engage cam-lever brake.



- **Pivot Design:** Engineered to keep the reel constantly in alignment with the hose for tangle-free washing.
- **Swivel Action:** Designed specifically for pressure Washer with stainless steel rotor and dual seals backed by two-year leak-free guarantee.
- **'Flip-Over' Hose Guide:** For ease in winding and unwinding as well as keeps hands clean and injury free.
- **Slip Protection:** Spring-action, stainless steel pin is quickly engaged or disengaged to prevent slippage during reel operation.
- **Cam-Lever Brake:** Made of durable components, turns on and off with the flick of a finger.
- **Hose Attachment:** Innovative design protects hose from hard pulls so that the strain is absorbed by a cushioned hose clamp.

360° Pivot Reel

Features a sturdy, lockable 360° pivot design. Numerous mounting options. These patented pivot reels are always aligned with the hose for tangle-free pressure washing. Rated at 5000 PSI and 325°F.



Part No.	Length
368193	100' x 3/8"
368198	200' x 3/8"

NOTE: Hose not included

Pivot Mounting Brackets

Select one of the pivot reels above and simply bolt it to any of these brackets or kits.



Part No.	Description
4-02751036	Pivot Reel Wall Mount
4-02751032**	Universal Bracket mount

*Wall stud plate is drilled for 16", 20" and 24" studs. Wall mount bracket is needed for installation with this.

**Universal bracket mounts to any round pipe, square tube or angle iron up to 1-1/2" in size.

Non-Pivot Hose Reels

Versatile line for high-pressure hose. Numerous mounting options. High-pressure reels carry a 2-year warranty and are rated at 5000 PSI and 325°F.



Front View



Non-pivot reels are designed to be bolted to one of the mounting brackets listed under "Non-Pivot Mounting Brackets".

Part No.	Length
368183	100' x 3/8"
368189	200' x 3/8"

NOTE: Hose not included

Non-Pivot Mounting Brackets

Select one of the non-pivot reels and simply bolt it to any of these brackets or kits.



Part No.	Description
4-02751041	Base Mount, Wall or Flatbed
4-02751060	Support Arm, 45°
4-02751044	Support Arm, 90°
4-02751043	Vertical Support Arm

Rapid Reel Swivels

Rapid Reel's very own swivel is designed specifically for pressure Washer and is the ONLY swivel guaranteed not to leak for 2 years! A stainless rotor and unique dual seal deliver extra long life.



- 5000 PSI
- Stainless steel rotor
- Unique dual seal for extra long life
- 2 year warranty

Part No.	Description	FPT x FPT	PSI
4-02751028	Rapid Reel Swivel, 1/2" x 3/8"	5000	
4-02751029	Rapid Reel Swivel Repair Kit		

HOSE REELS

AP Hose Reels



AP hose reels have been designed to perfectly balance ruggedness and durability with affordability.



Swivel Repair Kits

Part No.
110025

Replacement Swivels – See page 21

- Flared flanges for maximum capacity
- Solid center core for maximum strength
- Rolled beaded edge flanges for maximum safety
- Easy mounting options for maximum versatility
- “Posi-Pin” lock, prevents unwanted dereeling
- Heavy-duty powder coated steel
- Easy access external swivel
- 4000 PSI working pressure
- Rated temp: 225°F
- 3/8" or 1/2" Inlet/Outlet

Part No.	Hose Dia	Capacity (in feet)	Core Width	Flange Width	Flange Diameter	Overall Height
386188	3/8"	50	4.3	7.9	10.5	13.0"
386191	3/8"	100	8.7	12.2	10.5	13.0"
386206	3/8"	150	6.3	10.2	13.0	16.7"
386209	1/2"	100	6.3	10.2	13.0	16.7"

NOTE: Hose is not included in price. See page 15 for connector hose.



Swivel Repair Kits

Part No.	Hose Dia
075130	3/8"
075128	1/2"
110025*	

*For Round Swivels

Replacement Swivels – See page 21

- Super-reinforced core – Won't collapse!
- Adjustable brake for controlled reel tension
- Convenient external swivel
- Manual rewind handle included
- Solid core bolts onto flanges for extra strength
- 225°F max temperature
- Snap lock to prevent accidental dereeling
- Bearings have oil cap for easy field maintenance
- 4000 PSI working pressure

Professional Size Reel

Part No.	Hose Dia	Capacity (in feet)	Reel Size Width	Reel Size Diameter
386174	3/8"	150	6"	18"
386175	3/8"	300	10"	18"
386176	3/8"	350	14"	18"
386181	1/2"	200	10"	18"
386182	1/2"	270	14"	18"

NOTE: Hose is not included in price. Interchangeable parts available. Call for pricing. See page 15 for connector hose.

Space Saver Reel

Part No.	Hose Dia	Capacity (in feet)	Reel Size Width	Reel Size Diameter
386171	3/8"	90	6"	14"
386172	3/8"	140	10"	14"
386173	3/8"	200	14"	14"
386178	1/2"	115	10"	14"
386179	1/2"	150	14"	14"

NOTE: Hose is not included in price. Interchangeable parts available. Call for pricing. See page 15 for connector hose.

Cox Hose Reels



Cox reels offer high performance in a very compact and lightweight hand crank hose reel. Perfect for mobile application and permanent floor and wall mount.



4-02750001



4-02750003

- Rated up to 4000 PSI
- -20°F to 225°F
- Adjustable drag brake
- 90° brass swivel

Part No.	Description	PSI
4-02750001	175' x 3/8"	3000
4-02750002	50' x 3/8"	4000
4-02750003	100' x 3/8"	4000
4-020369	Handle Replacement	
4-020366	Locking Pin Assy	